



# Hi-777

PORTABLE TWO-WAY RADIO

**CTCSS,DCS / VOX**

- Battery saving / Emergency alarm
- Busy channel lock / Scanning function
- Intelligent charging / Low battery warning
- Flashlight function / PC programming

<b>VOX</b> function	<b>CTCSS</b> DCS	<b>16</b> channel
------------------------	---------------------	----------------------



**RETEVIS**  
[www.retevis.com](http://www.retevis.com)



# H-777

- large PTT / Clear Voice
- Easy to use / Bright flashlight
- Loud Voice / long stand-by time
- Stubborn frame material
- Ergonomic design
- Long communicate distance

## General

Model	H-777
Frequency Range	400-470MHz
Number of channels	16 channels
Normal Operating Voltage	3.7V
Operating Temperature	-20°C~+60°C
Frequency stability	±2.5ppm
Dimension(H x W x D)	115mm x 57mm x 32mm(with battery)
Weight	178g


## Transmitter

Output Power	5W/1W
Modulation	FM (F3E)
Maximum Frequency Deviation	≤ 5kHz
Spurious Power	≤ 7.5 μW
Adjacent Channel Power	≤ -65dB / ≤ -60dB
Audio Distortion	< 5%
SNR	≥ -45dB / ≥ -40dB
CTCSS/DCS Frequency Deviation (W/N Band)	0.7±0.1kHz (W), 0.4±0.1kHz (N)
Modulation Sensitivity	8-12mV


## Receiver

Sensitivity	< 0.20 μV(12dB SINAD)
Adjacent CH. Sensitivity	≥ 65dB (W), ≥ 55dB (N)
Audio Power	1 W
Audio Distortion	5%
Intermediation W/N	≥ 65dB (W), ≥ 55dB (N)

## Standard Accessories

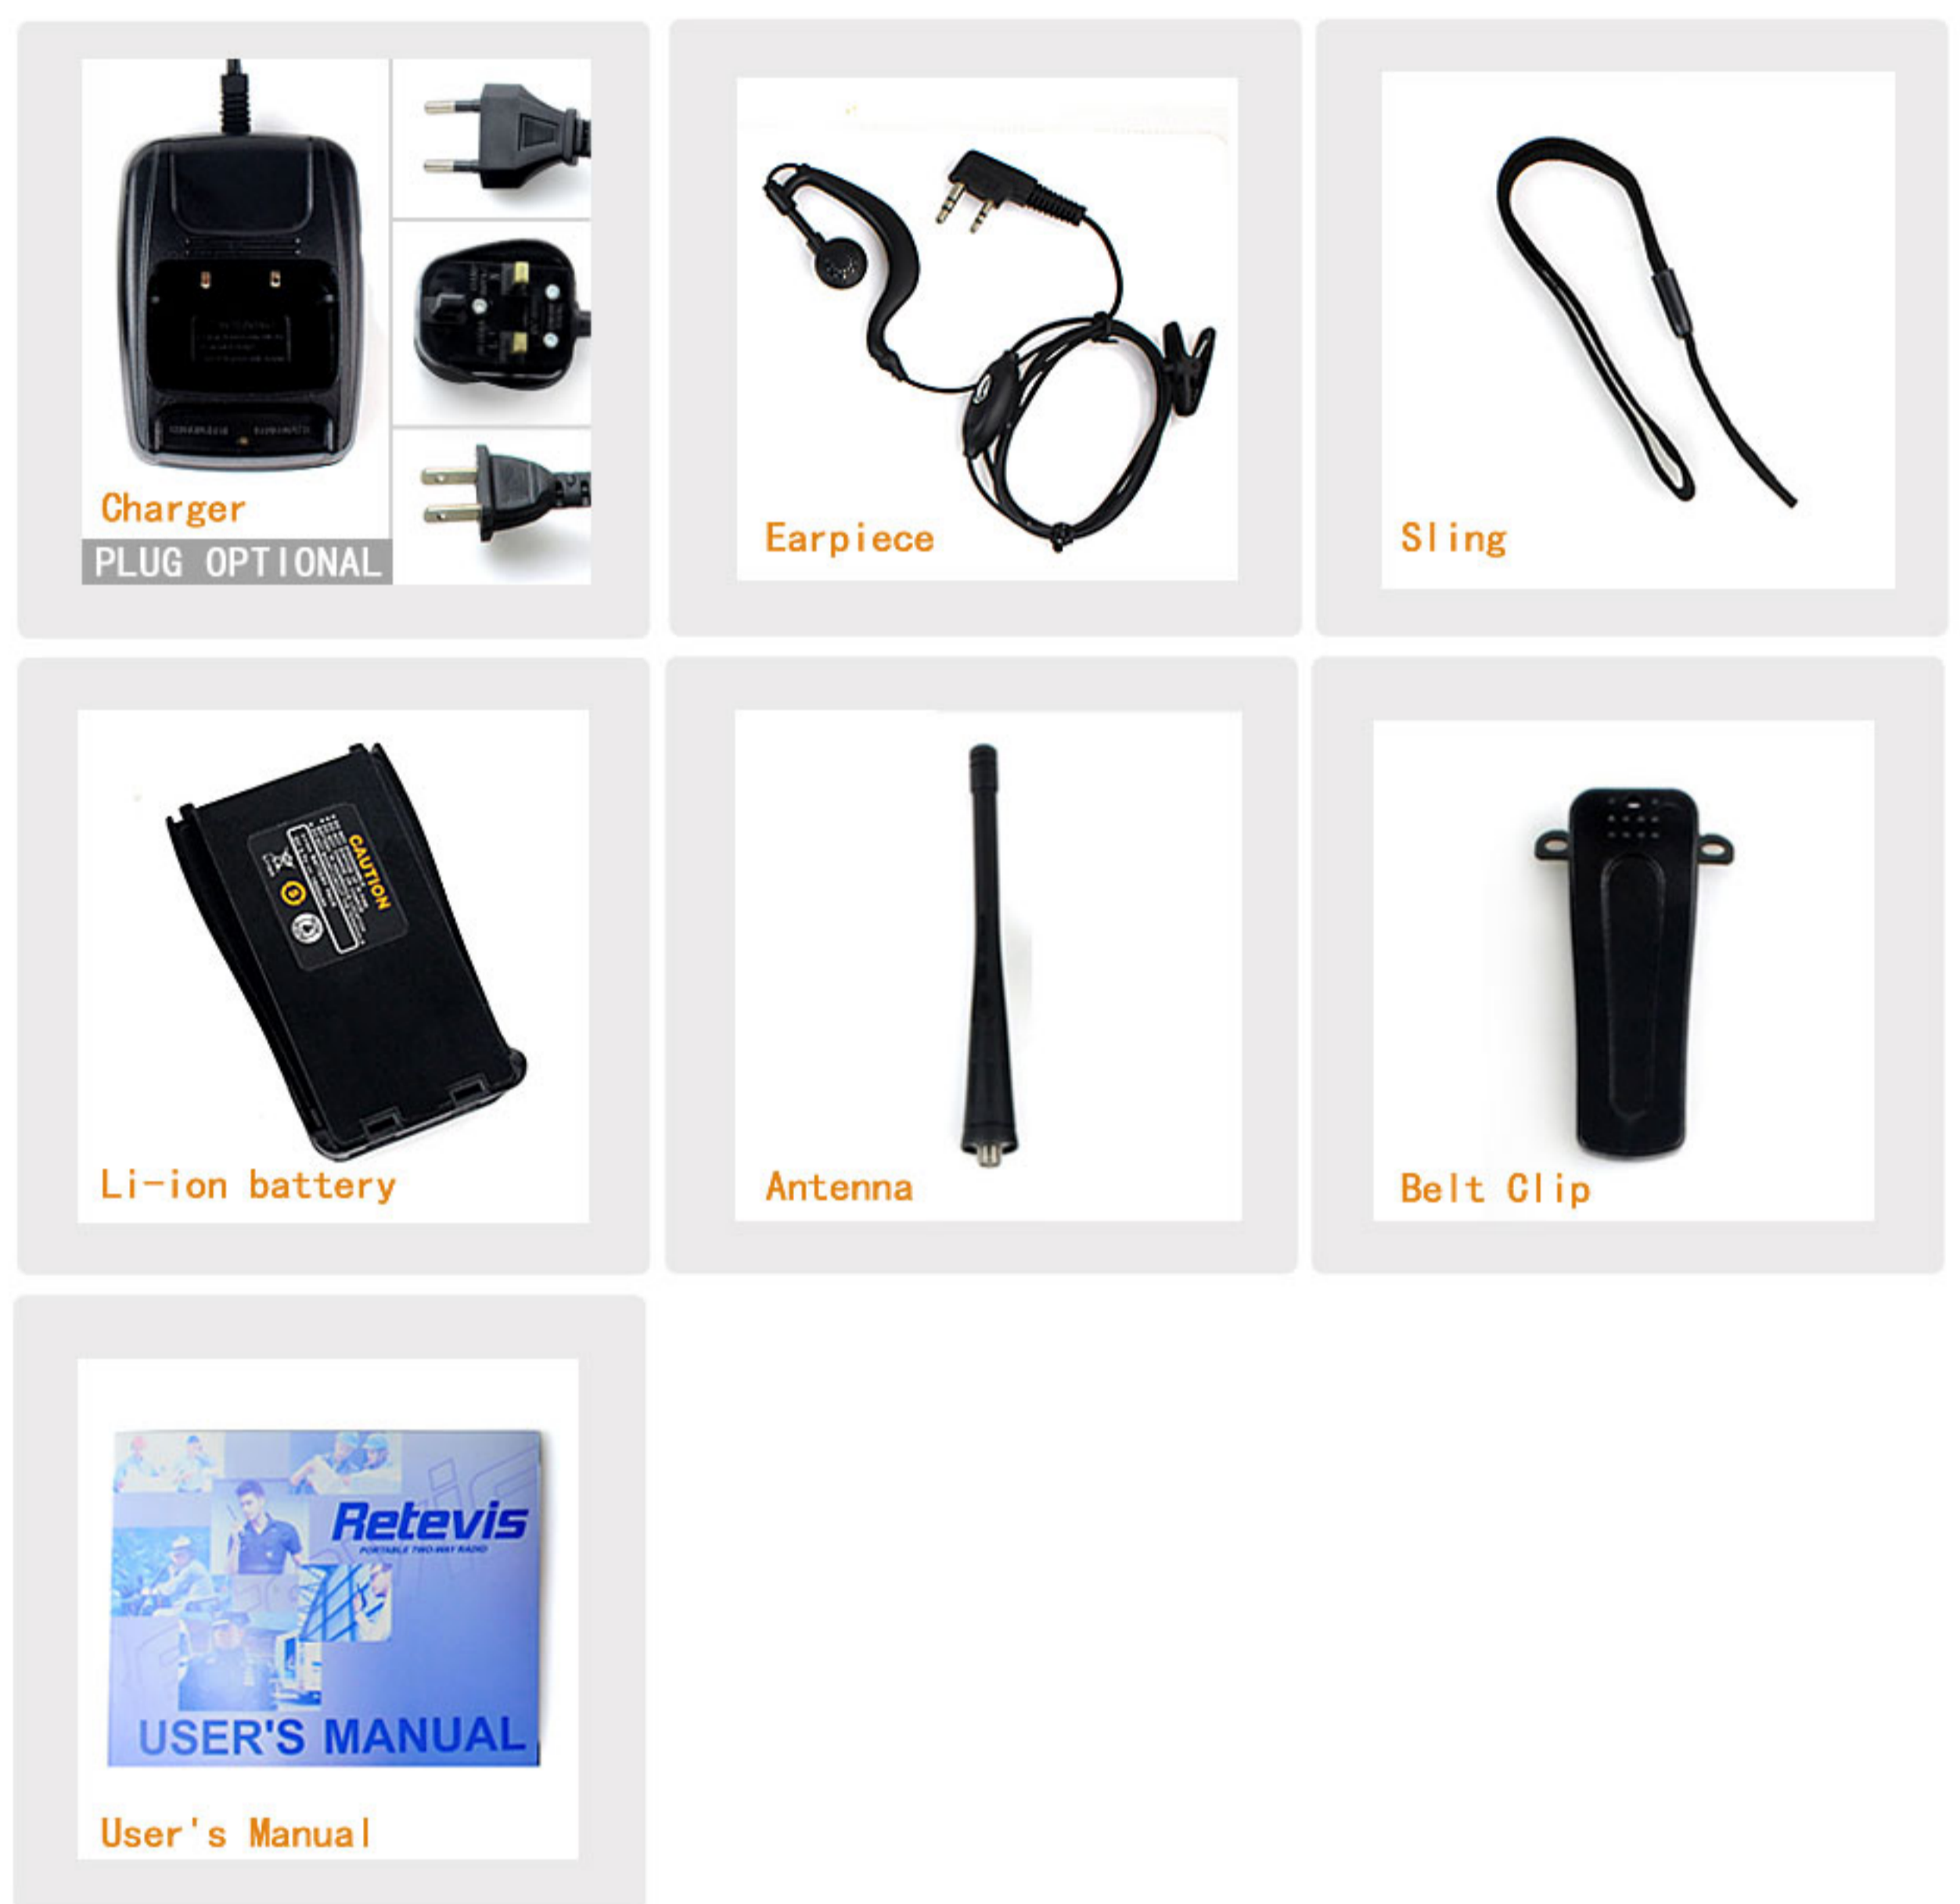

## Optional Accessories

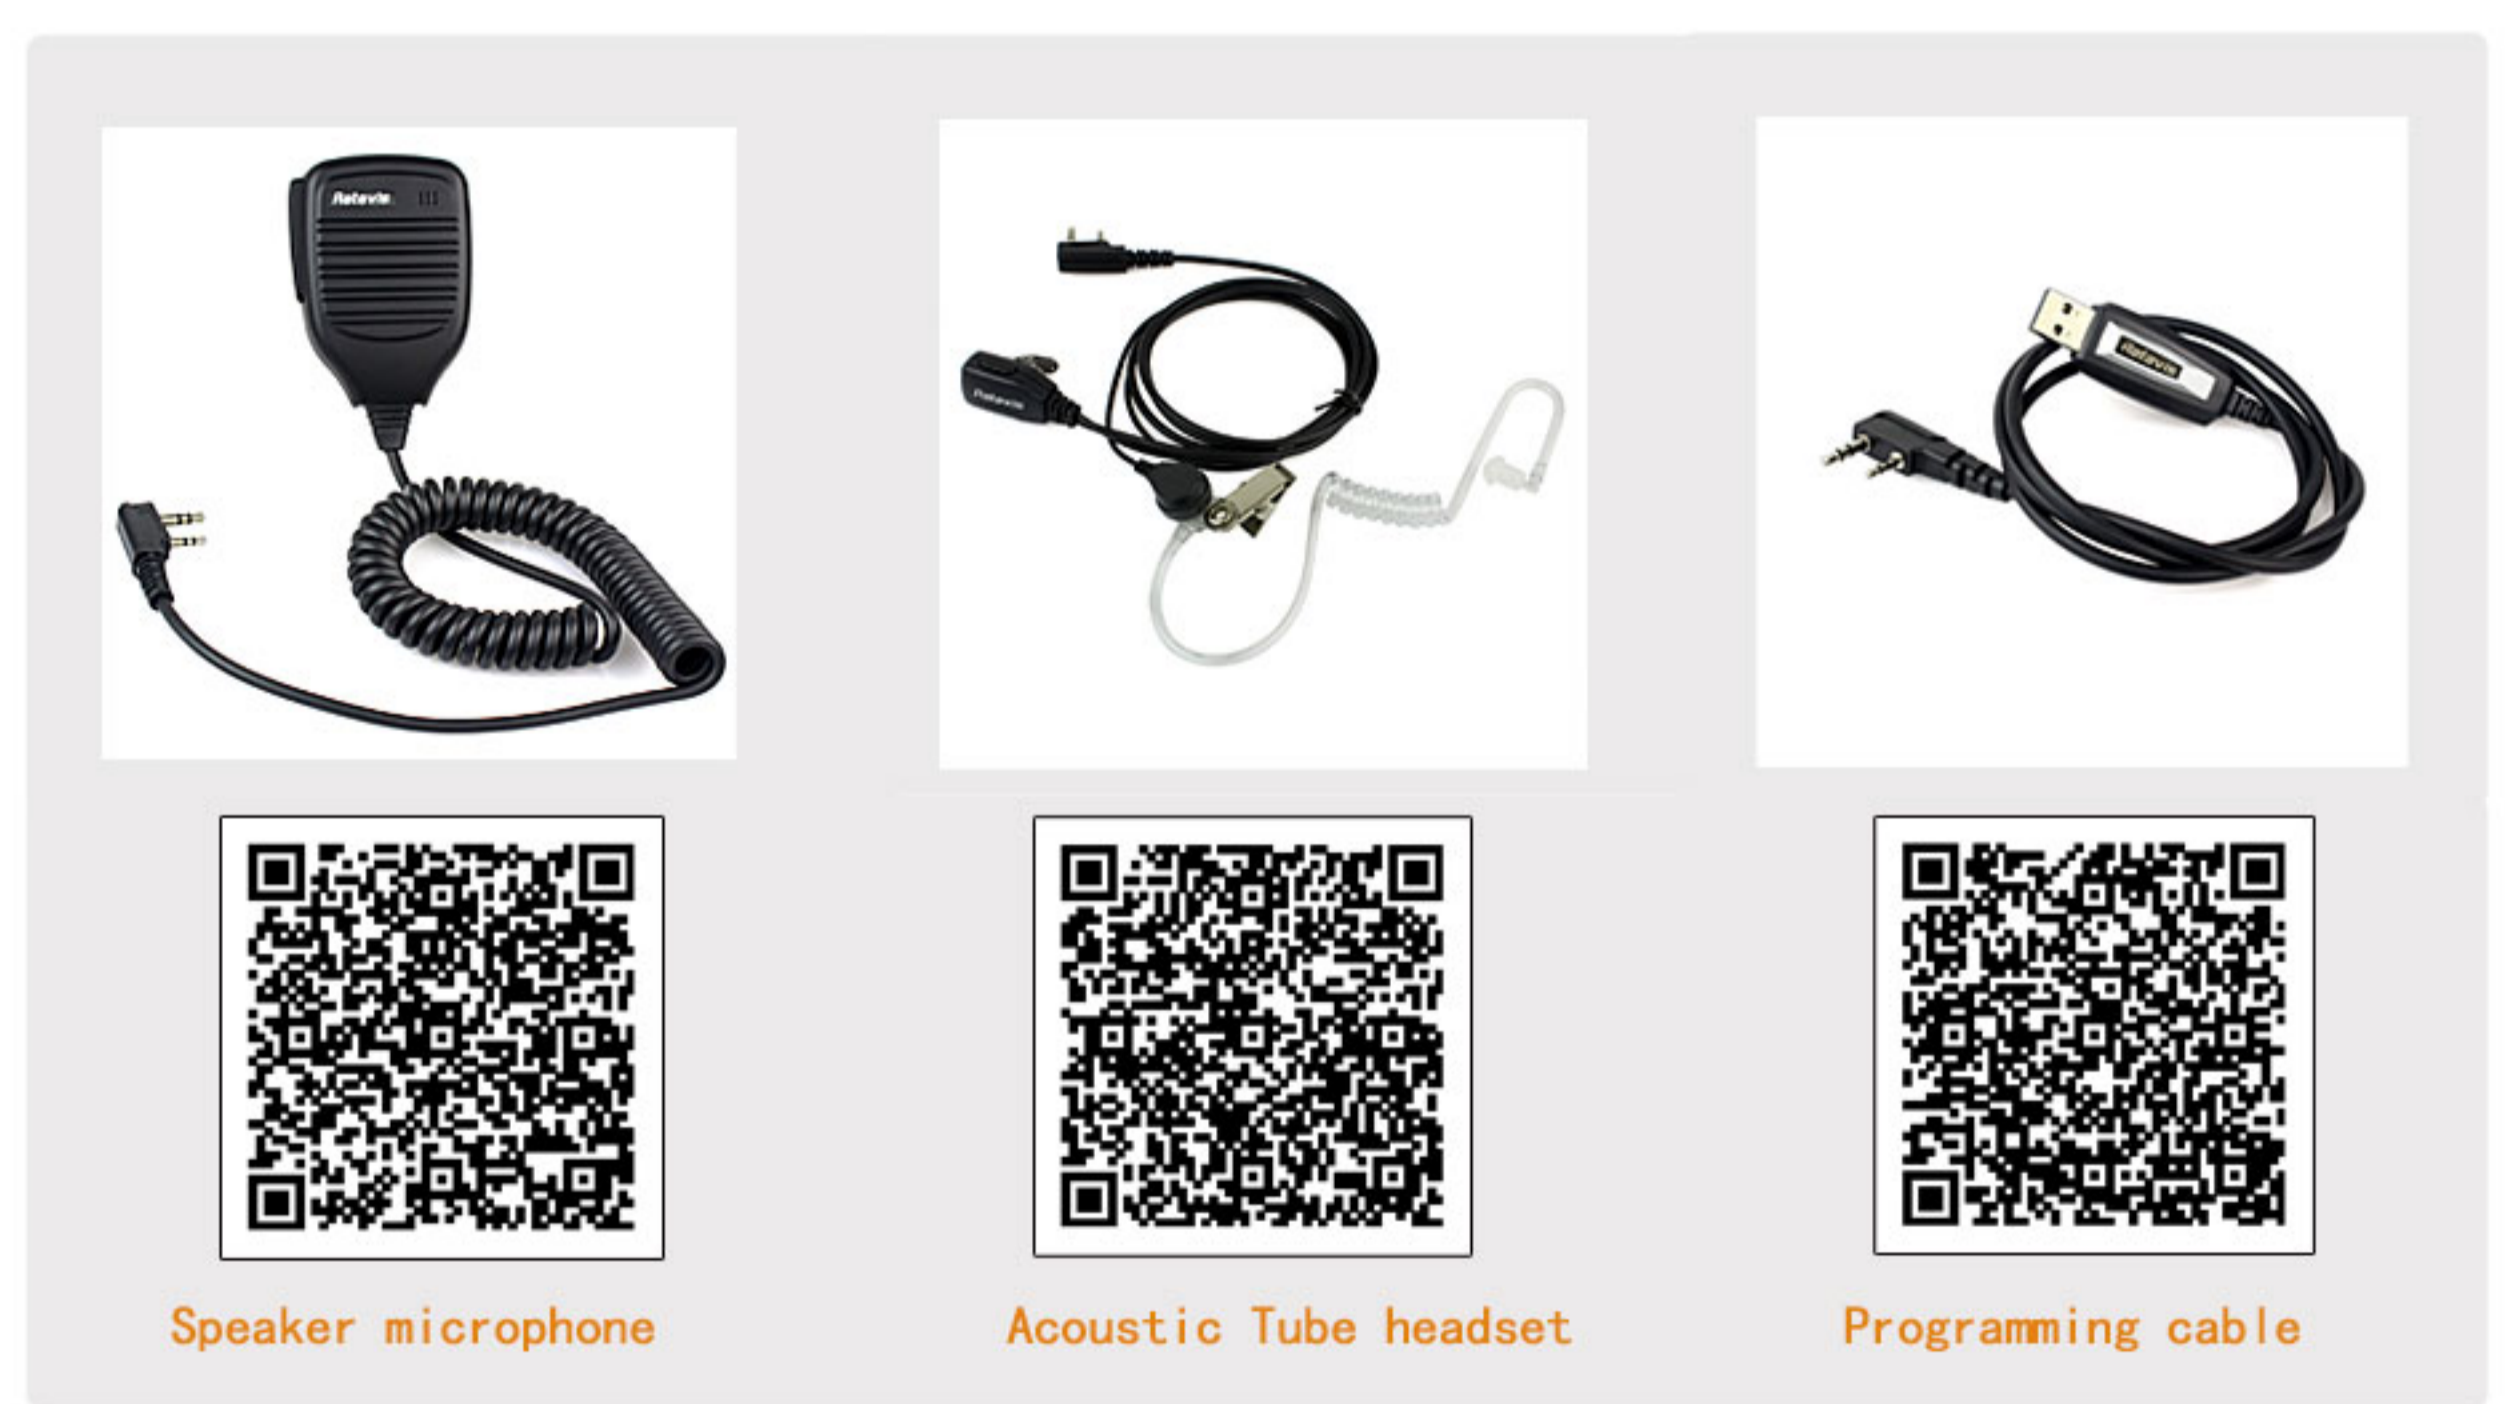

CE FC RoHS

More optional caessories please refer to our website [www.retevis.com](http://www.retevis.com)



SHENZHEN RETEVIS TECHNOLOGY CO.,LTD  
[www.retevis.com](http://www.retevis.com) [kam@retevis.com](mailto:kam@retevis.com)